




ROLLER CHAINS


BS/DIN STANDARD ROLLER CHAIN ATTACHMENTS

A1

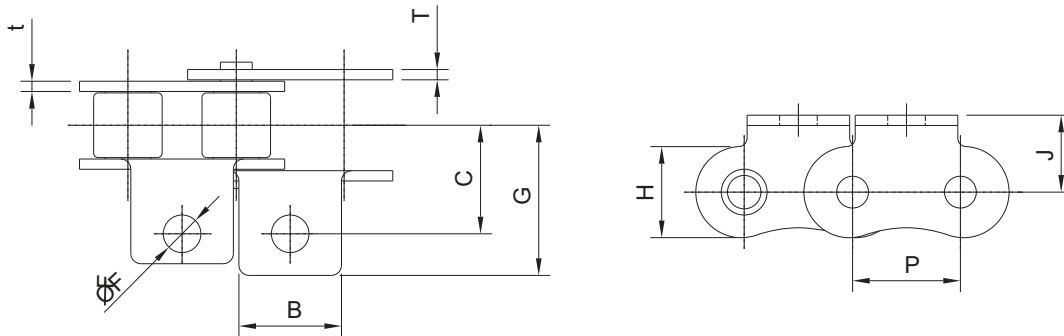

MC CHAIN NO.	P	H	J	F	B	C	G	t	T
08BA1	12.7	11.83	8.9	4.3	11.0	13.8	20.85	1.5	1.5
10BA1	15.875	14.56	10.3	5.3	14.0	15.9	24.8	1.65	1.65
12BA1	19.05	16.0	12.2	6.6	18.0	17.6	26.35	1.8	1.8
16BA1	25.40	20.8	17.0	8.4	24.0	29.0	42.8	4.0	3.2

K1

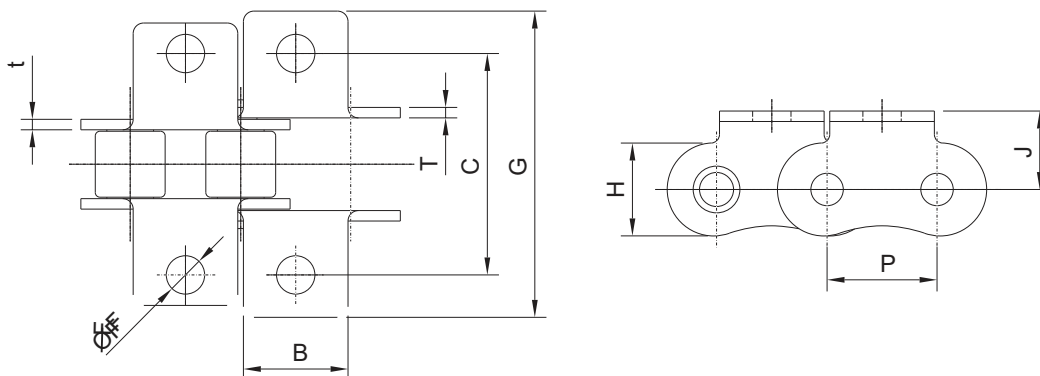

MC CHAIN NO.	P	H	J	F	B	C	G	t	T
08BK1	12.7	11.83	8.9	4.3	11.0	27.6	41.7	1.5	1.5
10BK1	15.875	14.56	10.3	5.3	14.0	31.8	49.6	1.65	1.65
12BK1	19.05	16.0	12.2	6.6	18.0	35.2	52.7	1.8	1.8
16BK1	25.40	20.8	17.0	8.4	24.0	58.0	85.6	4.0	3.2


N.B. All bushes and rollers are seamless, manufactured from tube giving improved wear characteristics and chain life.



ROLLER CHAINS


BS/DIN STANDARD ROLLER CHAIN ATTACHMENTS

WA2

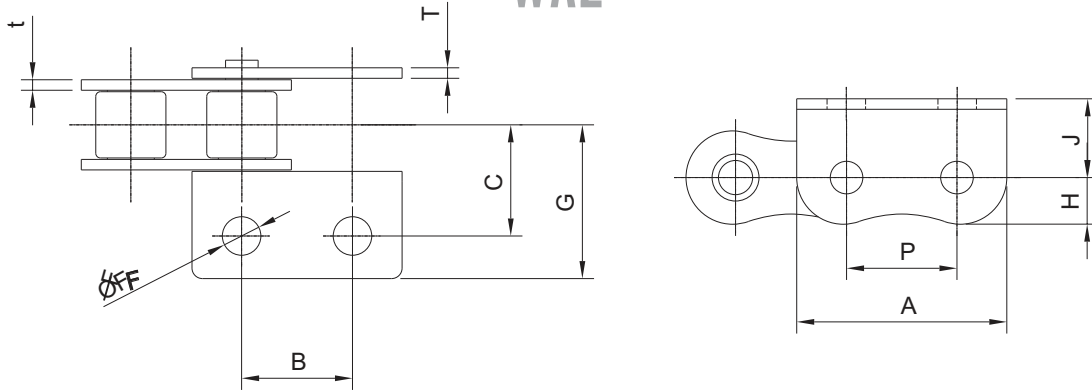

MC CHAIN NO.	P	H	A	J	F	B	C	G	t	T
08BWA2	12.7	5.1	22.9	8.9	4.3	12.7	13.8	20.85	1.5	1.5
10BWA2	15.875	6.5	28.95	10.3	5.3	15.9	15.9	24.8	1.65	1.65
12BWA2	19.05	8.0	36.0	12.2	6.6	19.0	17.6	26.35	1.8	1.8
16BWA2	25.40	10.4	45.7	17.9	8.4	25.4	29.0	42.8	4.0	3.2

WK2

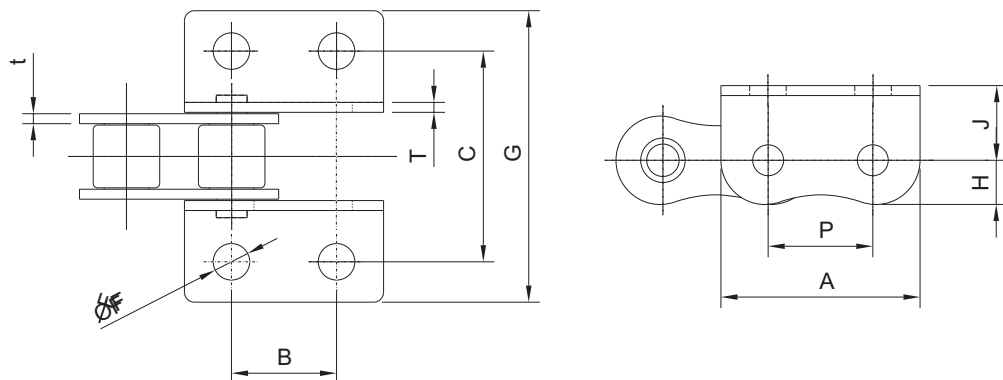

MC CHAIN NO.	P	H	A	J	F	B	C	G	t	T
08BWK2	12.7	5.1	22.9	8.9	4.3	12.7	27.6	41.7	1.5	1.5
10BWK2	15.875	6.5	28.95	10.3	5.3	15.9	31.8	49.6	1.65	1.65
12BWK2	19.05	8.0	36.0	12.2	6.6	19.0	35.2	52.7	1.8	1.8
16BWK2	25.40	10.4	45.7	17.9	8.4	25.4	58.0	85.6	4.0	3.2



N.B. All bushes and rollers are seamless, manufactured from tube giving improved wear characteristics and chain life.



ROLLER CHAINS



BS/DIN STANDARD ROLLER CHAIN ATTACHMENTS

SA1

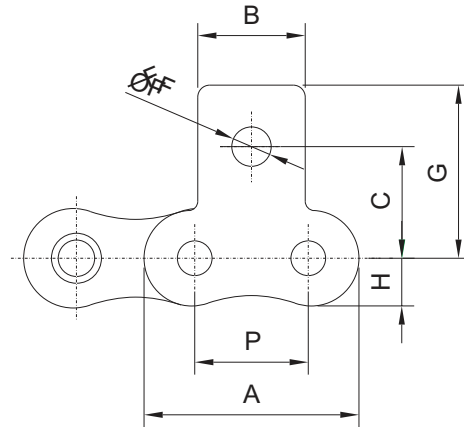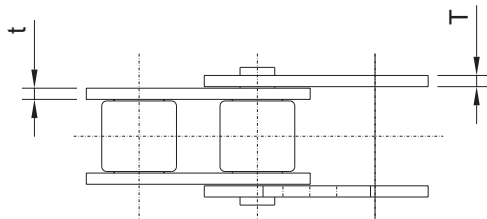

MC CHAIN NO.	P	A	H	C	F	G	B	t	T
08BSA1	12.7	22.9	5.1	13.7	4.3	20.8	11.0	1.5	1.5
10BSA1	15.875	28.95	6.5	16.5	5.3	24.9	14.0	1.65	1.65
12BSA1	19.05	36.0	8.0	18.5	6.6	28.2	18.0	1.8	1.8
16BSA1	25.40	45.7	10.4	27.4	8.4	39.7	24.0	4.0	3.2

SK1

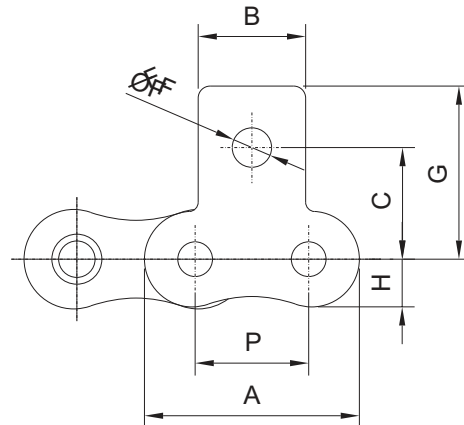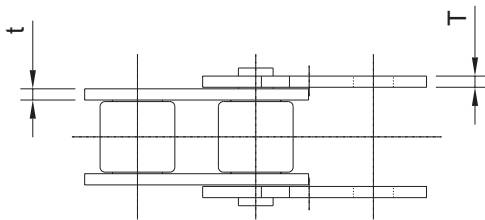

MC CHAIN NO.	P	A	H	C	F	G	B	t	T
08BSK1	12.7	22.9	5.1	13.7	4.3	20.8	11.0	1.5	1.5
10BSK1	15.875	28.95	6.5	16.5	5.3	24.9	14.0	1.65	1.65
12BSK1	19.05	36.0	8.0	18.5	6.6	28.2	18.0	1.8	1.8
16BSK1	25.40	45.7	10.4	27.4	8.4	39.7	24.0	4.0	3.2


N.B. All bushes and rollers are seamless, manufactured from tube giving improved wear characteristics and chain life.



ROLLER CHAINS


BS/DIN STANDARD ROLLER CHAIN ATTACHMENTS

WSA2

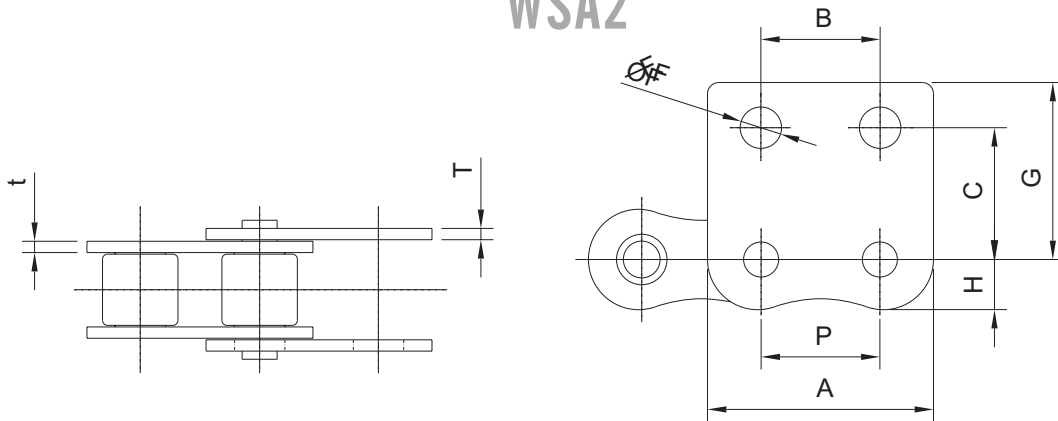

MC CHAIN NO.	P	A	H	C	F	G	B	t	T
08BWSA2	12.7	22.9	5.1	13.7	4.3	20.8	12.7	1.5	1.5
10BWSA2	15.875	28.95	6.5	16.5	5.3	24.9	15.9	1.65	1.65
12BWSA2	19.05	36.0	8.0	18.5	6.6	28.2	19.0	1.8	1.8
16BWSA2	25.40	45.7	10.4	27.4	8.4	39.7	25.4	4.0	3.2

WSK2

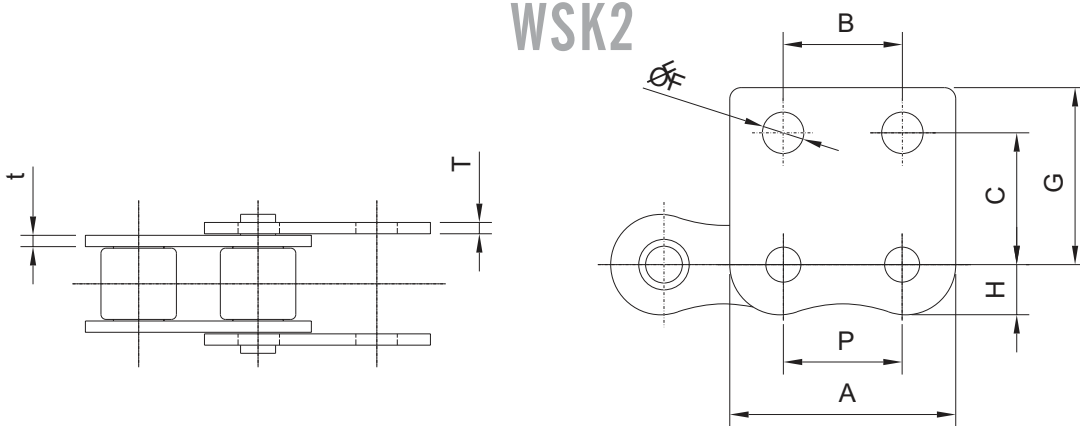

MC CHAIN NO.	P	A	H	C	F	G	B	t	T
08BWSK2	12.7	22.9	5.1	13.7	4.3	20.8	12.7	1.5	1.5
10BWSK2	15.875	28.95	6.5	16.5	5.3	24.9	15.9	1.65	1.65
12BWSK2	19.05	36.0	8.0	18.5	6.6	28.2	19.0	1.8	1.8
16BWSK2	25.40	45.7	10.4	27.4	8.4	39.7	25.4	4.0	3.2


N.B. All bushes and rollers are seamless, manufactured from tube giving improved wear characteristics and chain life.




ROLLER CHAINS

BS/DIN STANDARD ROLLER CHAIN ATTACHMENTS

D1

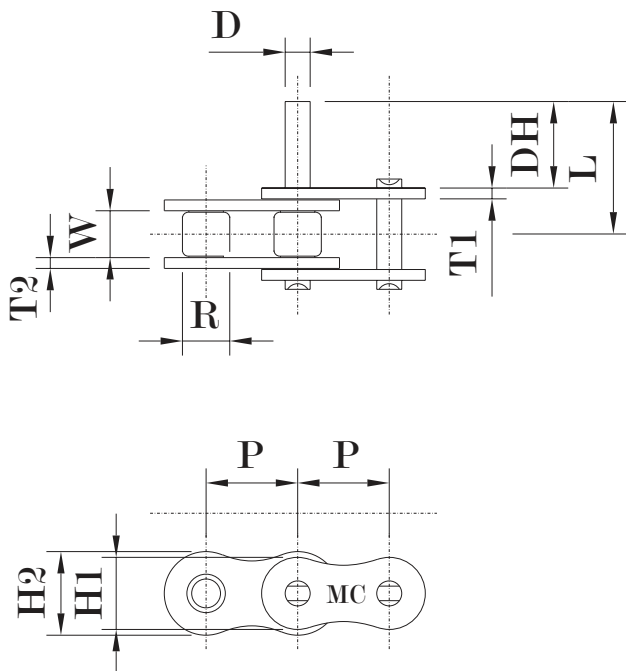

D3

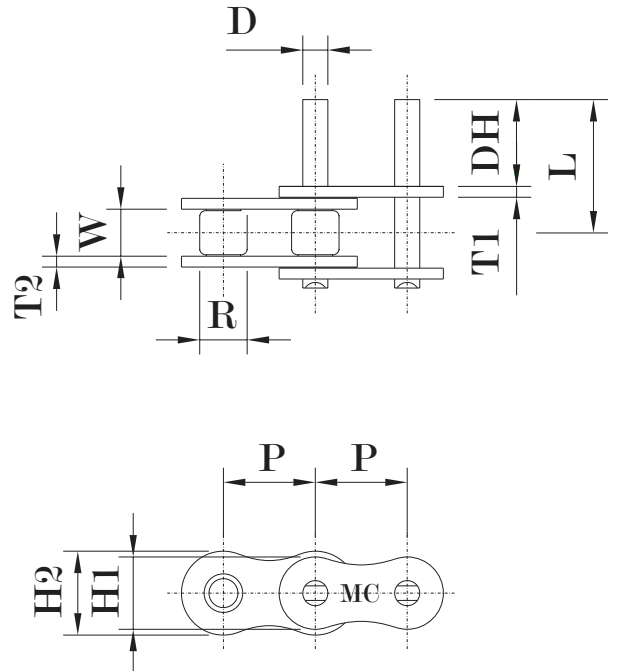

MC CHAIN NO.	Pitchx Width		Roller	Links				Pin			Average Ultimate Strength kgf
	P x W		Dia	Height		Thickness		Dia	Lengths		
	inch	mm	R	H1	H2	T1	T2	D	DH	L	
06B	0.375"x0.255"	9.525x5.72	6.35	8.10	8.10	1.00	1.25	3.28	11.30	16.63	1050
08B	0.5"x0.305"	12.70x7.75	8.51	10.20	11.80	1.50	1.50	4.44	14.80	22.05	1900
10B	0.625"x0.38"	15.875x9.65	10.16	13.00	14.60	1.65	1.65	5.06	17.60	26.05	2700
12B	0.75"x0.46"	19.05x11.68	12.07	16.00	16.00	1.80	1.80	5.67	20.70	30.48	3300
16B	1"x0.67"	25.40x17.02	15.88	20.80	20.80	3.20	4.00	8.27	33.30	49.33	7800
20B	1.25"x0.77"	31.75x19.56	19.05	26.00	26.00	3.50	4.50	10.18	38.30	56.50	10500
24B	1.5"x1"	38.10x25.40	25.40	33.00	33.00	5.20	6.00	14.62	50.30	74.65	18700


N.B. All bushes and rollers are seamless, manufactured from tube giving improved wear characteristics and chain life.




ROLLER CHAINS

ANSI STANDARD ROLLER CHAIN ATTACHMENTS


SA1

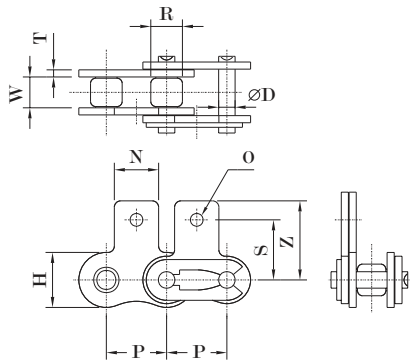


SK1

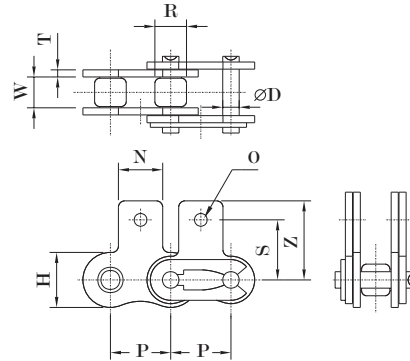

A1

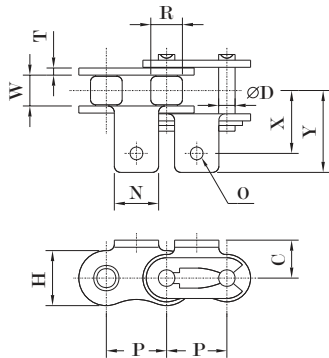

K1

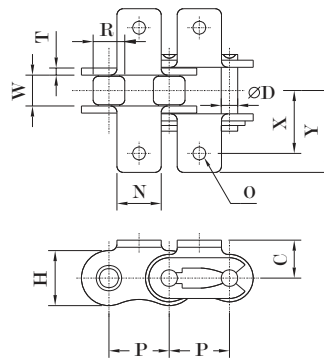

MC CHAIN NO.	Pitch x Width		Roller	Links		Pin	Attachment								Average Ultimate Strength
	P x W		Dia	Height	Thickness	Dia				A-1,K-1			SA-1,SK-1		
	inch	mm	R	H	T	D	N	O	C	X	Y	S	Z	kgf	
35	3/8"x3/16"	9.525x4.78	5.08	9.00	1.20	3.59	7.90	2.60	3.30	6.35	9.50	14.30	9.50	14.55	1050
40	1/2"x5/16"	12.70x7.95	7.92	11.80	1.50	3.96	9.50	3.60		8.00	12.70	17.80	12.70	17.40	1850
50	5/8"x3/8"	15.875x9.53	10.16	14.80	2.00	5.06	12.70	5.10		10.30	15.90	23.40	15.90	23.05	3100
60	3/4"x1/2"	19.05x12.70	11.91	17.50	2.40	5.95	15.90	5.10		11.90	19.05	28.20	18.30	26.85	4400
80	1"x5/8"	25.40x15.88	15.88	23.90	3.10	7.94	19.10	6.80		15.90	25.40	36.60	24.60	35.45	8000
100	1-1/4"x3/4"	31.75x19.05	19.05	28.90	3.90	9.52	25.40	8.70		19.80	31.75	44.90	31.80	44.00	12000


N.B. All bushes and rollers are seamless, manufactured from tube giving improved wear characteristics and chain life.




ROLLER CHAINS

ANSI STANDARD ROLLER CHAIN ATTACHMENTS


WSA1

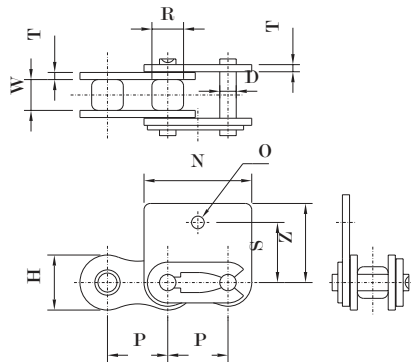


WSK1

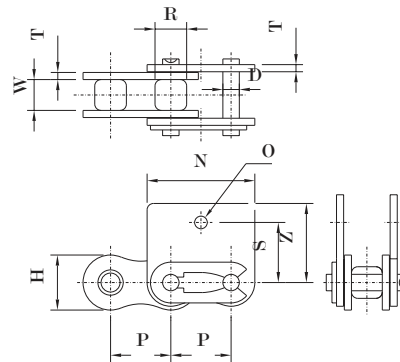

WA1

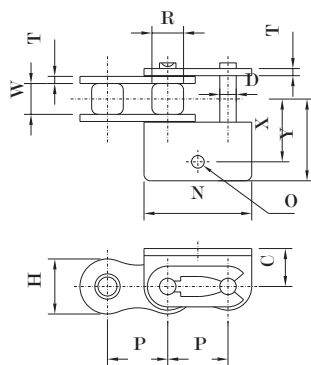

WK1

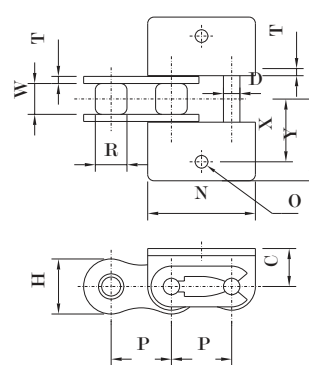

MC CHAIN NO.	Pitch x Width		Roller	Links		Pin	Attachment								Average Ultimate Strength kgf
	P x W		Dia	Height	Thickness	Dia				WA-1,WK-1			WSA-1,WSK-1		
	inch	mm	R	H	T	D	N	O		C	X	Y	S	Z	
35	3/8"x3/16"	9.525x4.78	5.08	9.00	1.20	3.59	17.10	3.30		6.35	9.50	14.30	9.50	13.80	1050
40	1/2"x5/16"	12.70x7.95	7.92	11.80	1.50	3.96	22.90	3.30	4.50	8.00	12.70	17.80	12.70	17.40	1850
50	5/8"x3/8"	15.875x9.53	10.16	14.80	2.00	5.06	28.70	5.10	5.50	10.30	15.90	23.40	15.90	23.05	3100
60	3/4"x1/2"	19.05x12.70	11.91	17.50	2.40	5.95	34.60	6.60		11.90	19.05	28.20	18.30	26.85	4400
80	1"x5/8"	25.40x15.88	15.88	23.90	3.10	7.94	45.70	6.80	9.00	15.90	25.40	36.60	24.60	35.45	8000


N.B. All bushes and rollers are seamless, manufactured from tube giving improved wear characteristics and chain life.




ROLLER CHAINS

ANSI STANDARD ROLLER CHAIN ATTACHMENTS


WSA2

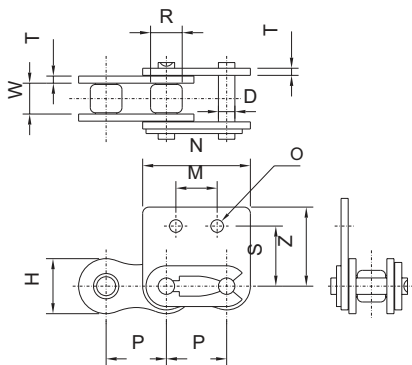


WSK2

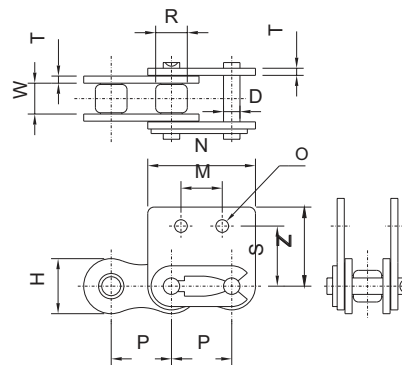

WA2

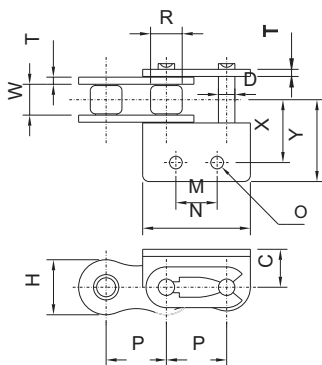

WK2

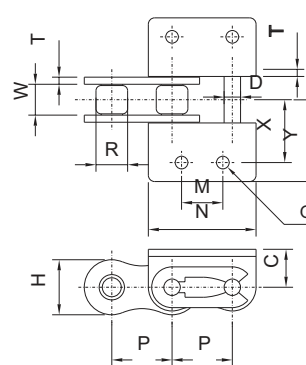



MC CHAIN NO.	Pitch x Width		Roller	Links		Pin	Attachment									Average Ultimate Strength kgf
	P x W		Dia	Height	Thickness	Dia					WA-2,WK-2			WSA-2,WSK-2		
	inch	mm	R	H	T	D	M	N	O	C	X	Y	S	Z		
35	3/8"x3/16"	9.525x4.78	5.08	9.00	1.20	3.59	9.50	17.10	3.30		6.35	9.50	14.30	9.50	13.80	1050
40	1/2"x5/16"	12.70x7.95	7.92	11.80	1.50	3.96	9.50	22.90	3.30	4.50	8.00	12.70	17.80	12.70	17.60	1850
50	5/8"x3/8"	15.875x9.53	10.16	14.80	2.00	5.06	11.90	28.70	5.10	5.50	10.30	15.90	23.40	15.90	23.05	3100
60	3/4"x1/2"	19.05x12.70	11.91	17.50	2.40	5.95	14.30	34.60	5.10	6.60	11.90	19.05	28.20	18.30	26.85	4400
80	1"x5/8"	25.40x15.88	15.88	23.90	3.10	7.94	19.10	45.70	6.80	9.00	15.90	25.40	36.60	24.60	35.45	8000

N.B. All bushes and rollers are seamless, manufactured from tube giving improved wear characteristics and chain life.



ROLLER CHAINS

ANSI STANDARD ROLLER CHAIN ATTACHMENTS

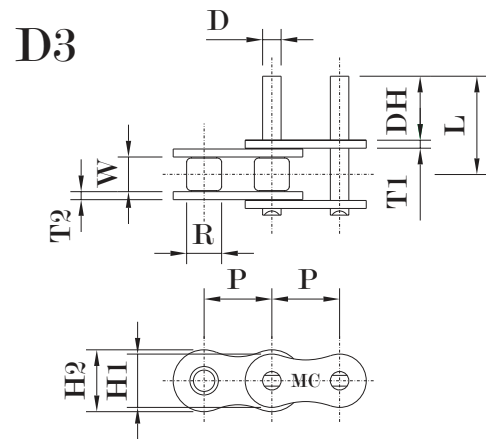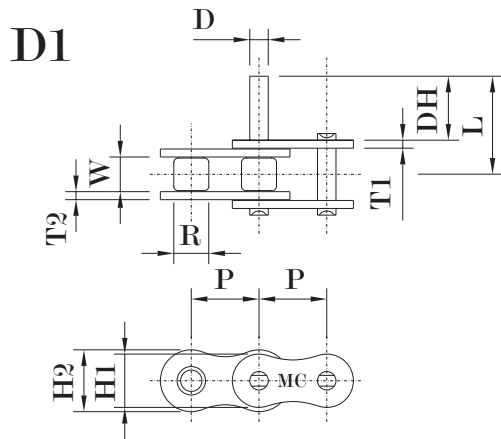

MC CHAIN NO.	Pitch x Width		Roller	Links				Pin			Average Ultimate Strength
	P x W		Dia	Height		Thickness		Dia	Lenghts		
	inch	mm	R	H1	H2	T1	T2	D	DH	L	kgf
* 35	3/8"x3/16"	9.525x4.78	5.08	7.60	9.00	1.20	1.20	3.59	9.52	14.52	1050
40	1/2"x5/16"	12.70x7.95	7.92	10.20	11.80	1.50	1.50	3.96	9.52	16.72	1850
41	1/2"x1/4"	12.70x6.35	7.77	8.50	9.70	1.20	1.20	3.58	9.52	15.40	1200
50	5/8"x3/8"	15.875x9.53	10.16	13.00	14.80	2.00	2.00	5.06	11.91	20.96	3100
60	3/4"x1/2"	19.05x12.70	11.91	15.50	17.50	2.40	2.40	5.95	14.27	25.60	4400
80	1"x5/8"	25.40x15.88	15.88	20.40	23.90	3.10	3.10	7.94	19.05	33.48	8000
100	1-1/4"x3/4"	31.75x19.05	19.05	24.80	28.90	3.90	3.90	9.52	23.83	41.83	12000
120	1-1/2"x1"	38.10x25.40	22.23	30.00	35.00	4.70	4.70	11.10	28.60	51.25	17000
140	1-3/4"x1"	44.45x25.40	25.40	36.20	42.00	5.60	5.60	12.70	33.30	57.70	21500
160	2"x1-1/4"	50.80x31.75	28.58	41.40	48.00	6.40	6.40	14.28	38.10	67.35	27500

* Rollerless chain, R indicates bush diameter.





N.B. All bushes and rollers are seamless, manufactured from tube giving improved wear characteristics and chain life.



CONVEYOR CHAINS

ANSI STANDARD DOUBLE PITCH CONVEYOR CHAIN ATTACHMENTS

DOUBLE PITCH CONVEYOR CHAIN ATTACHMENTS

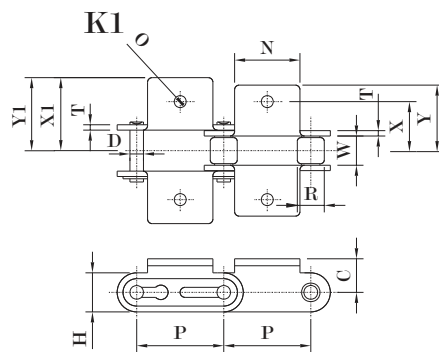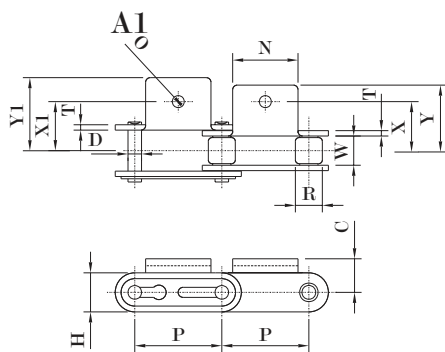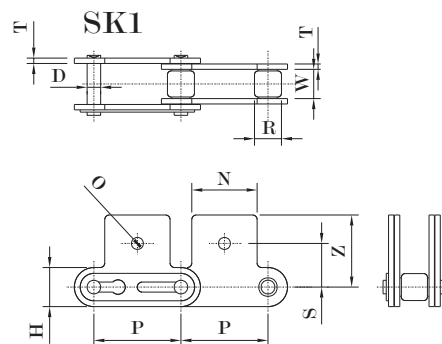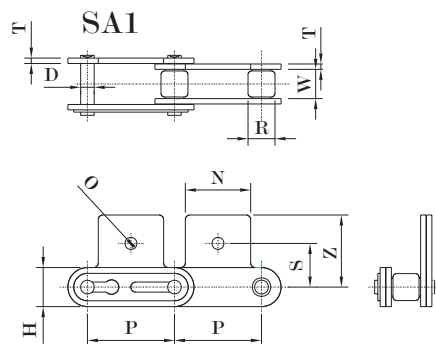

MC CHAIN NO.	Pitch P	Width W	Roller	Linkplate		Pin	Attachment										Average Ultimate Strength kgf
			Dia	Height	Thickness	Dia		A-1 K-1	SA-1 SK-1	A-1,K-1					SA-1,SK-1		
			R	H	T	D	N	O	O	C	X	Y	X1	Y1	S	Z	
C2040	25.40	7.95	7.92	11.70	1.50	3.96	19.10	3.60	5.10	9.10	12.70	17.65	12.70	19.30	11.10	19.80	1850
C2042	25.40	7.95	15.88	11.70	1.50	3.96	19.10	3.60	5.10	9.10	12.70	17.65	12.70	19.30	11.10	19.80	1850
C2050	31.75	9.53	10.16	14.60	2.00	5.06	23.80	5.10	6.80	11.10	15.90	21.95	15.90	24.15	14.25	24.10	3100
C2052	31.75	9.53	19.05	14.60	2.00	5.06	23.80	5.10	6.80	11.10	15.90	21.95	15.90	24.15	14.25	24.10	3100
C2060H	38.10	12.70	11.91	17.10	3.10	5.95	28.60	5.10	8.70	14.70	21.45	28.68	21.45	31.95	17.50	31.55	5300
C2062H	38.10	12.70	22.23	17.10	3.10	5.95	28.60	5.10	8.70	14.70	21.45	28.68	21.45	31.95	17.50	31.55	5300
C2080H	50.80	15.88	15.88	23.00	3.90	7.94	38.10	6.80	10.30	19.10	27.80	36.52	27.80	40.70	22.20	40.50	9200
C2082H	50.80	15.88	28.58	23.00	3.90	7.94	38.10	6.80	10.30	19.10	27.80	36.52	27.80	40.70	22.20	40.50	9200





REMARK: Any special specifications, please feel free to contact us.



CONVEYOR CHAINS

ANSI STANDARD DOUBLE PITCH CONVEYOR CHAIN ATTACHMENTS

DOUBLE PITCH CONVEYOR CHAIN ATTACHMENTS

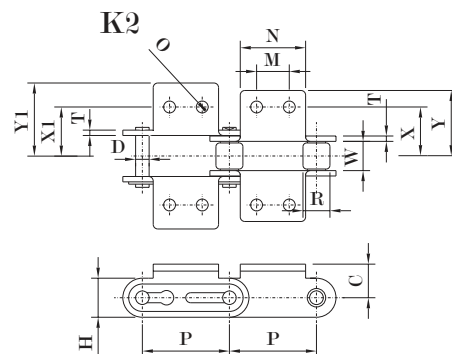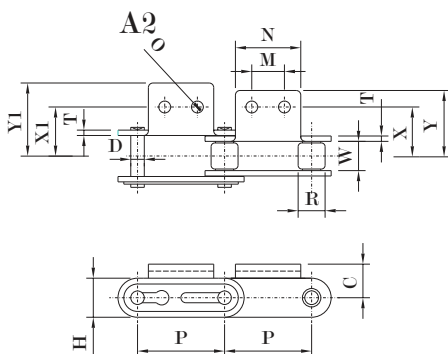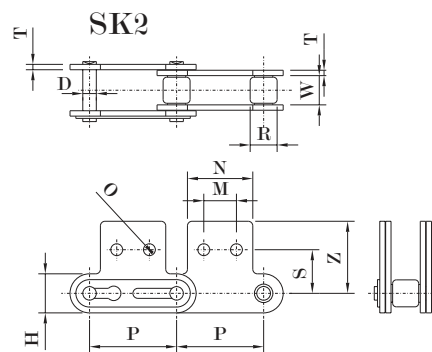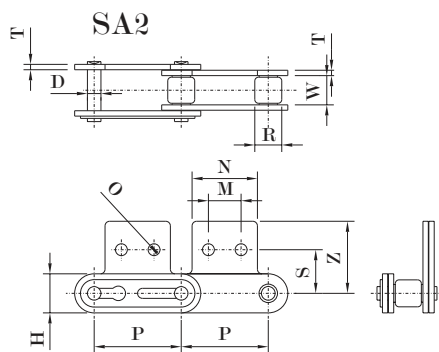

MC CHAIN NO.	Pitch P	Width W	Roller	Linkplate		Pin	Attachment											Average Ultimate Strength kgf
			Dia	Height	Thickness	Dia				A-2,K-2					SA-2,SK-2			
			R	H	T	D	N	O	M	C	X	Y	X1	Y1	S	Z		
C2040	25.40	7.95	7.92	11.70	1.50	3.96	19.10	3.60	9.50	9.10	12.70	17.65	12.70	19.30	13.60	19.80	1850	
C2042	25.40	7.95	15.88	11.70	1.50	3.96	19.10	3.60	9.50	9.10	12.70	17.65	12.70	19.30	13.60	19.80	1850	
C2050	31.75	9.53	10.16	14.60	2.00	5.06	23.80	5.10	11.90	11.10	15.90	21.95	15.90	24.15	15.90	24.10	3100	
C2052	31.75	9.53	19.05	14.60	2.00	5.06	23.80	5.10	11.90	11.10	15.90	21.95	15.90	24.15	15.90	24.10	3100	
C2060H	38.10	12.70	11.91	17.10	3.10	5.95	28.60	5.10	14.30	14.70	21.45	28.68	21.45	31.95	19.10	31.55	5300	
C2062H	38.10	12.70	22.23	17.10	3.10	5.95	28.60	5.10	14.30	14.70	21.45	28.68	21.45	31.95	19.10	31.55	5300	
C2080H	50.8	15.88	15.88	23.00	3.90	7.94	38.10	6.80	19.10	19.10	27.80	36.52	27.80	40.70	25.40	40.50	9200	
C2082H	50.8	15.88	28.58	23.00	3.90	7.94	38.10	6.80	19.10	19.10	27.80	36.52	27.80	40.70	25.40	40.50	9200	


REMARK: Any special specifications, please feel free to contact us.



CONVEYOR CHAINS


ANSI STANDARD DOUBLE PITCH CONVEYOR CHAIN ATTACHMENTS

DOUBLE PITCH CONVEYOR CHAIN ATTACHMENTS

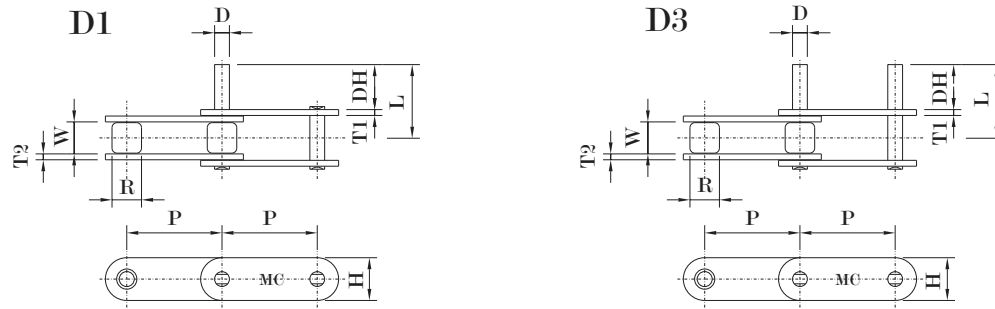

MC CHAIN NO.	Pitch x Width		Roller	Links			Pin			Average Ultimate Strength kgf
	P x W		Dia	Height	Thickness		Dia	Lenghts		
	inch	mm	R	H	T1	T2	D	DH	L	
A2040	1"x5/16"	25.40x7.92	7.92	10.10	1.50	1.50	3.96	9.52	16.72	1850
A2050	1-1/4"x3/8"	31.75x9.53	10.16	12.60	2.00	2.00	5.06	11.91	20.96	3100
C2040	1"x5/16"	25.40x7.95	7.92	11.70	1.50	1.50	3.96	9.52	16.72	1850
C2042	1"x5/16"	25.40x7.95	15.88	11.70	1.50	1.50	3.96	9.52	16.72	1850
C2050	1-1/4"x3/8"	31.75x9.53	10.16	14.60	2.00	2.00	5.06	11.91	20.96	3100
C2052	1-1/4"x3/8"	31.75x9.53	19.05	14.60	2.00	2.00	5.06	11.91	20.96	3100
C2060H	1-1/2"x1/2"	38.10x12.70	11.91	17.10	3.10	3.10	5.95	14.27	27.07	5300
C2062H	1-1/2"x1/2"	38.10x12.70	22.23	17.10	3.10	3.10	5.95	14.27	27.07	5300
C2080H	2"x5/8"	50.80x15.88	15.88	23.00	3.90	3.90	7.94	19.05	35.18	9200
C2082H	2"x5/8"	50.80x15.88	28.58	23.00	3.90	3.90	7.94	19.05	35.18	9200
C2100H	2-1/2"x3/4"	63.50x19.05	19.05	28.90	4.70	4.70	9.52	23.80	43.40	13500
C2102H	2-1/2"x3/4"	63.50x19.05	39.67	28.90	4.70	4.70	9.52	23.80	43.40	13500
C2120H	3"x1"	76.20x25.40	22.20	35.00	5.60	5.60	11.10	28.60	53.08	17000
C2122H	3"x1"	76.20x25.40	44.45	35.00	5.60	5.60	11.10	28.60	53.08	17000

G TYPE

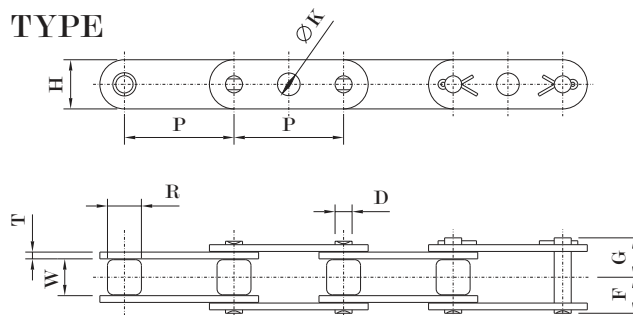

MC CHAIN NO.	Pitch P	Roller Link Width W	Roller	Links				Pin			Average Ultimate Strength kgf
			Dia	Height	Thickness	Hole K	Dia	Lenghts			
			R	H	T		D	F	G		
C2040	25.40	7.95	7.92	11.70	1.50	4.20	---	3.96	10.10	8.20	1850
C2042	25.40	7.95	15.88	11.70	1.50	4.20	---	3.96	10.10	8.20	1850
C2050	31.75	9.53	10.16	14.60	2.00	6.50	8.10	5.06	12.60	10.10	3100
C2052	31.75	9.53	19.05	14.60	2.00	6.50	8.10	5.06	12.60	10.10	3100
C2060H	38.10	12.70	11.91	17.10	3.10	---	8.10	5.95	16.60	14.10	5300
C2062H	38.10	12.70	22.23	17.10	3.10	---	8.10	5.95	16.60	14.10	5300
C2080H	50.80	15.88	15.88	23.00	3.90	10.10	12.10	7.94	20.80	17.90	9200
C2082H	50.80	15.88	28.58	23.00	3.90	10.10	12.10	7.94	20.80	17.90	9200